
PhotoFast[®]

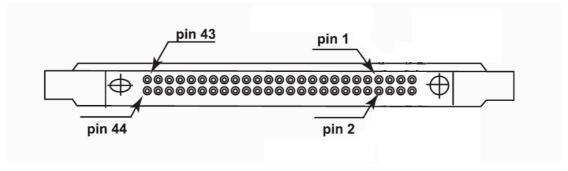

CONNECTOR CABLING INFORMATION

PIN	SIGNALS	PIN	SIGNALS
1	-RESET	2	GROUND
3	DD7	4	DD8
5	DD6	6	DD9
7	DD5	8	DD10
9	DD4	10	DD11
11	DD3	12	DD12
13	DD2	14	DD13
15	DD1	16	DD14
17	DD0	18	DD15
19	GROUND	20	OPEN
21	DMARQ, -DIOW	22	GROUND
23	STOP	24	GROUND
25	-DIOR	26	GROUND
	-DMARDY		
	HSTROBE		
27	IORDY	28	CSEL
	-DMARDY		
	-DSTROBE		
29	DMACK	30	GROUND
31	INTRQ	32	-IOCS16
33	DA1	34	- PDIAG/-CBLID
35	DA0	36	DA2
37	-CS0	38	-CS1
39	DASP	40	GROUND
41	+ 3.3V (LOGIC)	42	+ 3.3V (MOTOR)
43	GROUND	44	RESERVED

Note: "-" in front of signal name indicates negative logic.

Revision History